


Lecture 2

- Part 1 (Electronics)
 - Readout electronics
 - Noise
- Part 2 (Semiconductor detectors =sensors + electronics)
 - Segmented detectors
 - Strip/pixel detectors
 - Drift detectors
 - Photodiodes
 - CCD

Literature

- Glen F. Knoll, Radiation Detection and Measurement, chapters 11,13
- Semiconductor Radiation Detectors, Gerhard Lutz, Springer-Verlag, 1999

Single charge +Q:

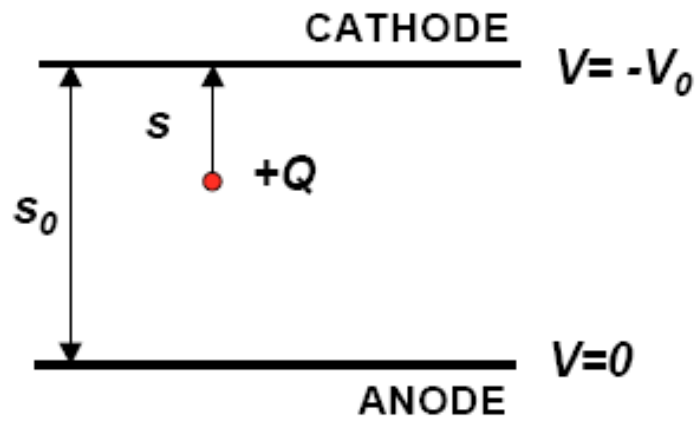

Charge induced on each electrode by +Q moving through the difference of potential dV :

$$dq = Q \frac{dV}{V_0} = Q \frac{ds}{s_0}$$

Integrating over s (or time t):

$$q(s) = \frac{Q}{s_0} s \quad q(t) = \frac{Q}{s_0} wt \quad w: \text{drift velocity}$$

Electrons- ion pair ($-Q$ and $+Q$) released at the same distance s from the cathode :

$$q(t) = Q \left(\frac{w^- t}{s_0} + \frac{w^+ t}{s_0} \right) \quad 0 \leq t \leq T^-$$


$$q(t) = Q \left(\frac{s - s_0}{s_0} + \frac{w^+ t}{s_0} \right) \quad T^- \leq t \leq T^+$$

w^- (w^+) : electron (ion) drift velocity

T^- (T^+) : total electron (ion) drift time

Total signal: $q(T^+) = Q$

(+Q on cathode , -Q on anode)

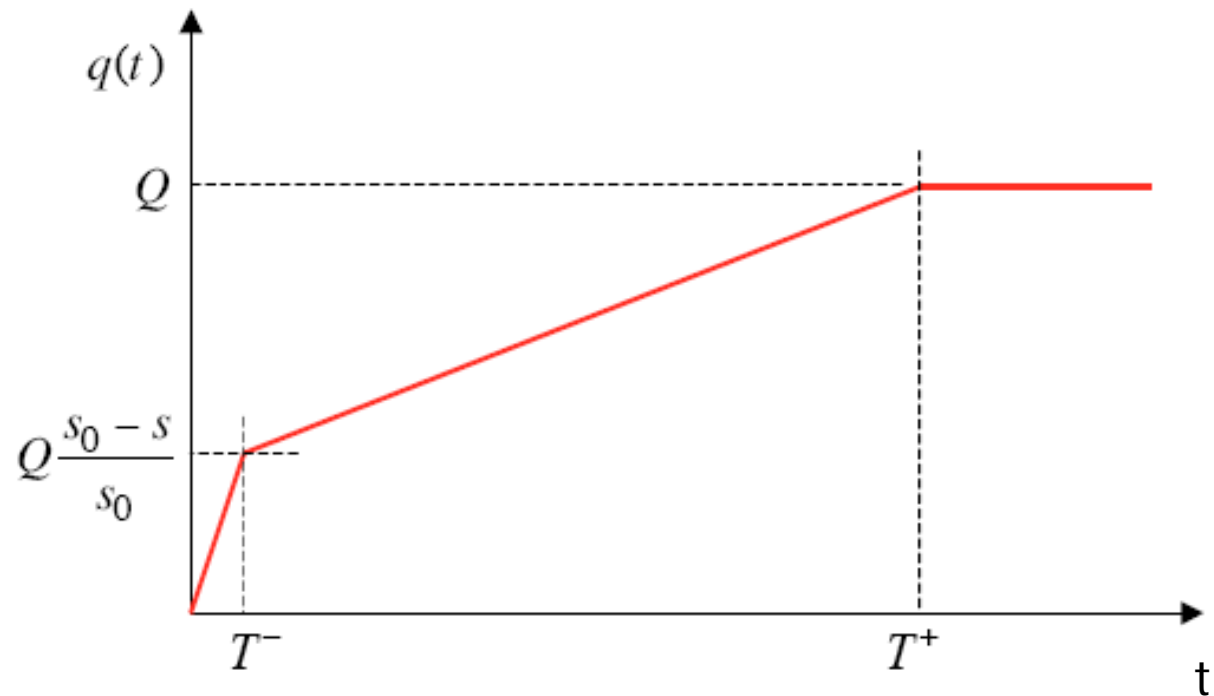



In wire chambers with avalanche amplification near anode wire the relation is:

$$V_{electron}^{signal} = -\frac{Q}{lCV_0} \int_{r_0}^{r_0+\lambda} \frac{dV}{dr} dr = -\frac{Q}{2\pi\epsilon_0 l} \ln \frac{r_0 + \lambda}{r_0}$$

$$V_{ion}^{signal} = +\frac{Q}{lCV_0} \int_{r_0+\lambda}^R \frac{dV}{dr} dr = +\frac{Q}{2\pi\epsilon_0 l} \ln \frac{R}{r_0 + \lambda}$$






lC=total capacitance

since $\lambda \ll R$ the positive ions contribute ($\sim 100x$) more to the signal formation than electrons

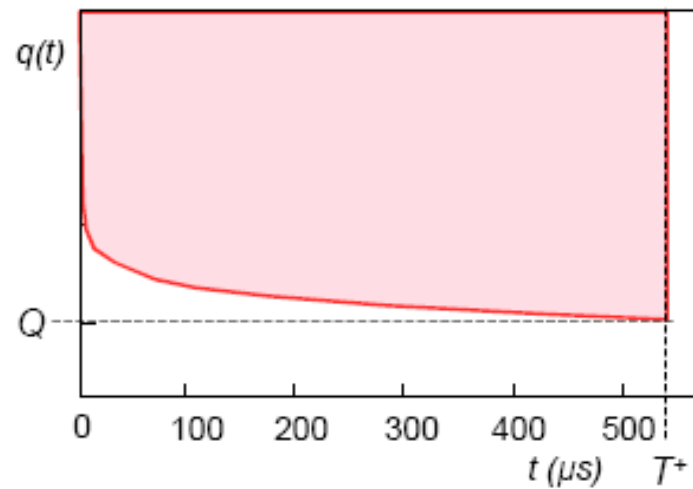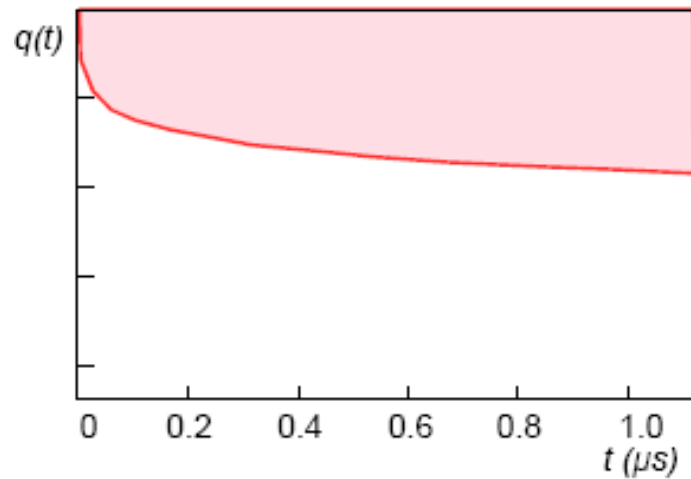

Readout Electronics

- The readout electronics is needed for converting the charge pulse from the sensor to a voltage signal which can be discriminated or converted to a digital form in an Analogue to Digital Converter circuit (ADC)
- The readout electronics consist typically of a chain with a pre-amplifier which is charge sensitive and a shaper. The pre-amplifier is integrating the charge impulse over a time interval → peaking time. The shaper is shaping the pulse to match the needs of the electronics further down the chain → shaping time. The shaper is also filtering noise improving the signal to noise ratio S/N.

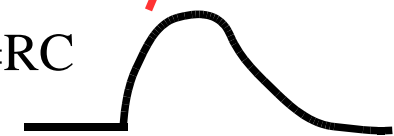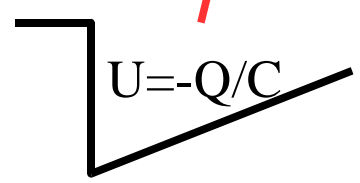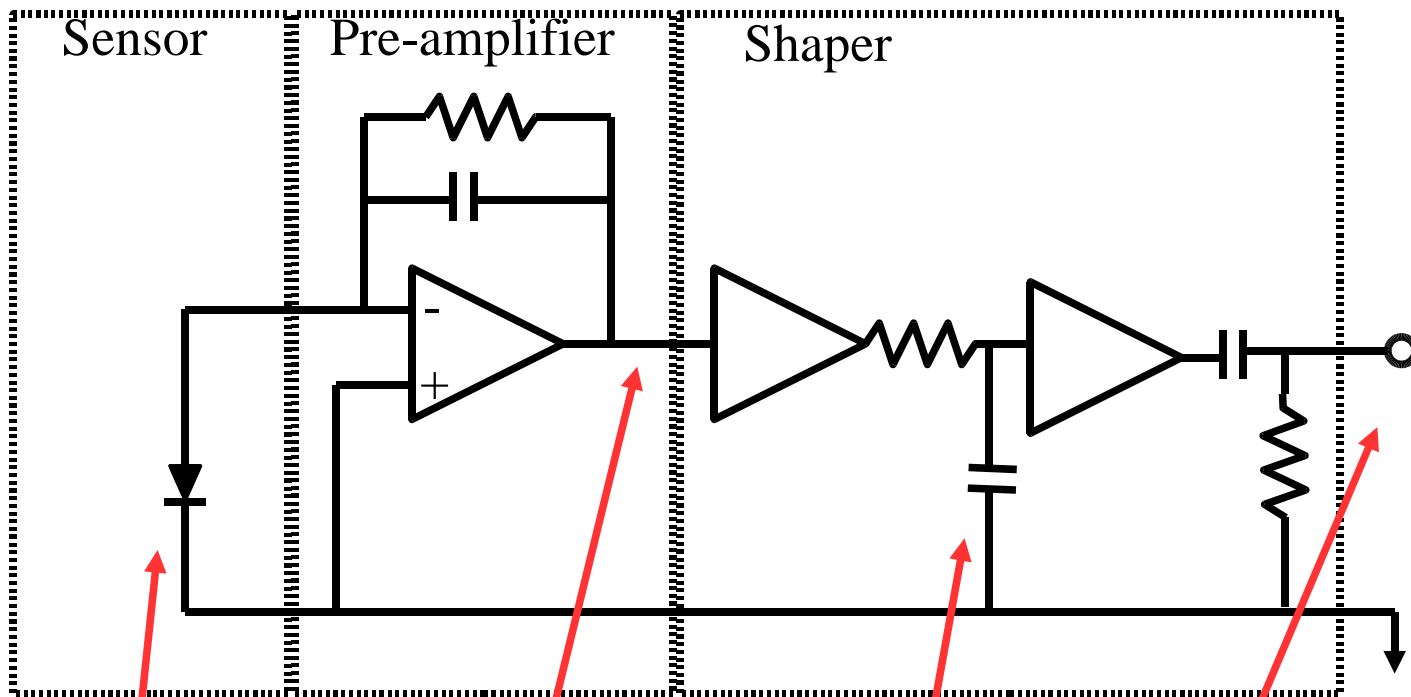

Noise (1)


- The noise of a charge sensitive amplifier can be described like a voltage source (in series) on and a current in (parallel) with the input of the amplifier, hence we call them:
 - ✓ serial noise: The voltage on the input of the amplifier fluctuates and even if there is no signal on the input. Noise is injected because of the load created by the sensor capacitance.
 - ✓ parallel noise: Noise created by mainly the leakage current in the sensor (shot noise) and the noise from the biasing circuit.
- For RC-CR shaping the relation between shaping time and S/N is:

$$\frac{S}{N_{serial}} = \sqrt{\tau}$$

$$\frac{S}{N_{para}} = \frac{1}{\sqrt{\tau}}$$

Sensor

Readout electronics

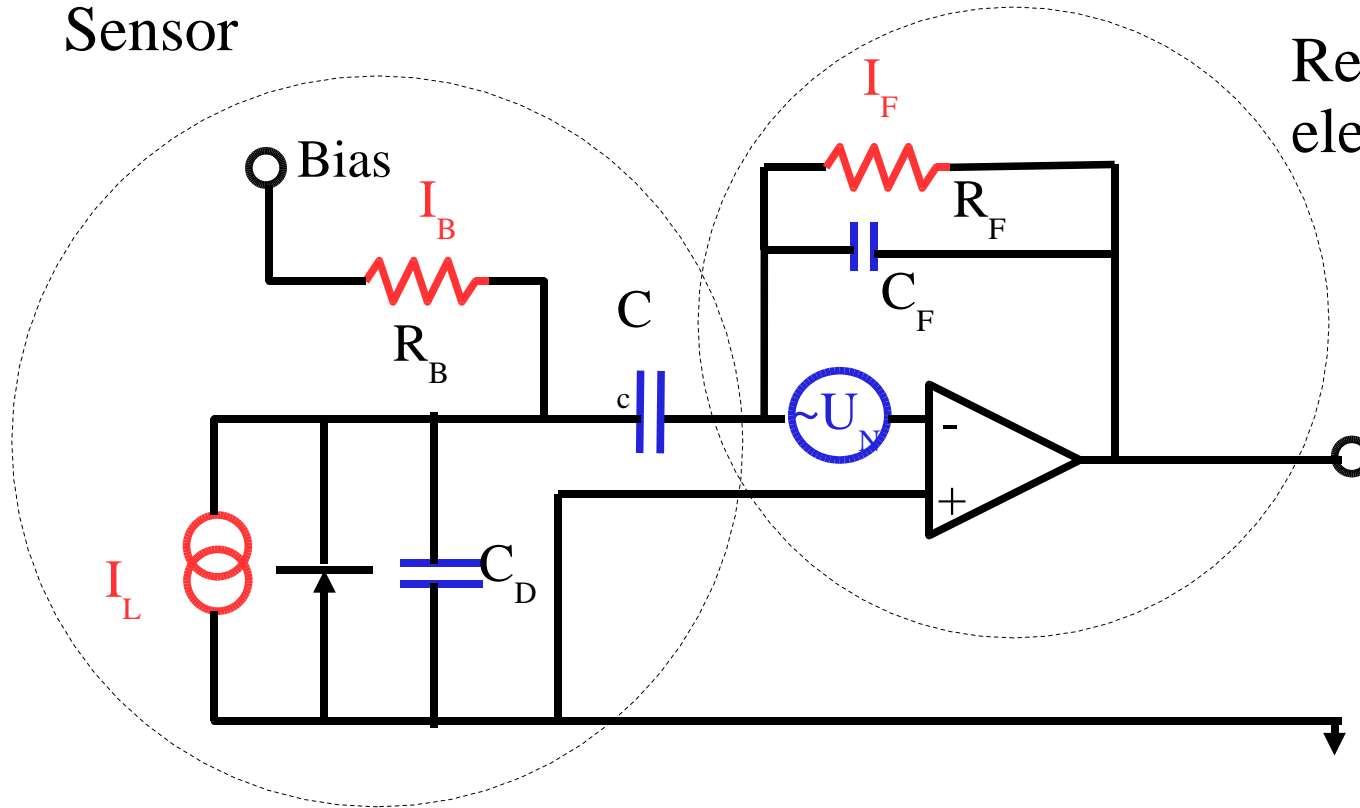

Contributes to parallel noise



Contributes to serial noise

Noise (3)

- Serial noise (*for circuit on the previous slide*)

$$-Q_N(S) = U_N \left(\frac{1}{\frac{1}{C_D} + \frac{1}{C_C}} + C_F \right) = U_N C_{tot}$$

U_N is given by the amplifier design, processing etc.

C_C coupling capacitance need to be large

C_D we want to keep small

C_F is small to give good amplification

In segmented sensors we will get an additional capacitance to the neighbouring cells which may dominate the total capacitance

Noise (4)


- Parallel noise


The noise contribution from the bias resistor need to be added to the noise arising from the leakage current in the sensor (Lecture 2). The noise from the bias and feedback resistors is temperature dependent. The resistance of the feedback resistor is typically large, hence the contribution from the feedback resistor can be neglected.

$$I_B = \frac{4kT}{2qR}$$

Segmented semiconductor detectors


- Apart from the excellent spectroscopic properties of the semiconductor detectors they are very frequently used because they can be segmented. Segmented detectors can be used for measuring the position of a track or to measure an intensity distribution (imaging) e.t.c.
- The sensors can be segmented in 1-dimension → strip (in xy), circles (radially), or in 2-dimension → pixelised

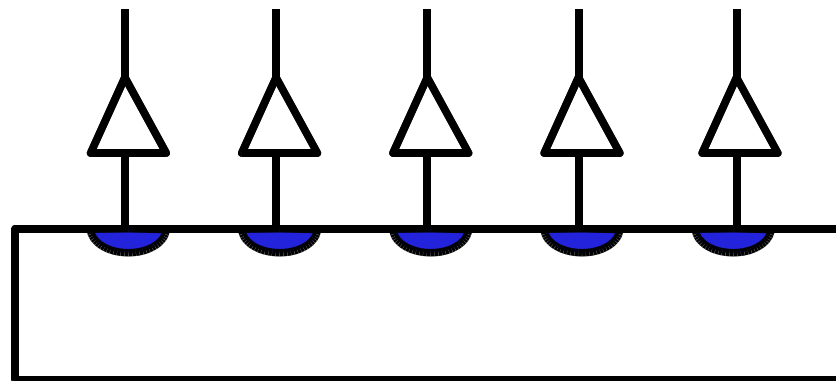

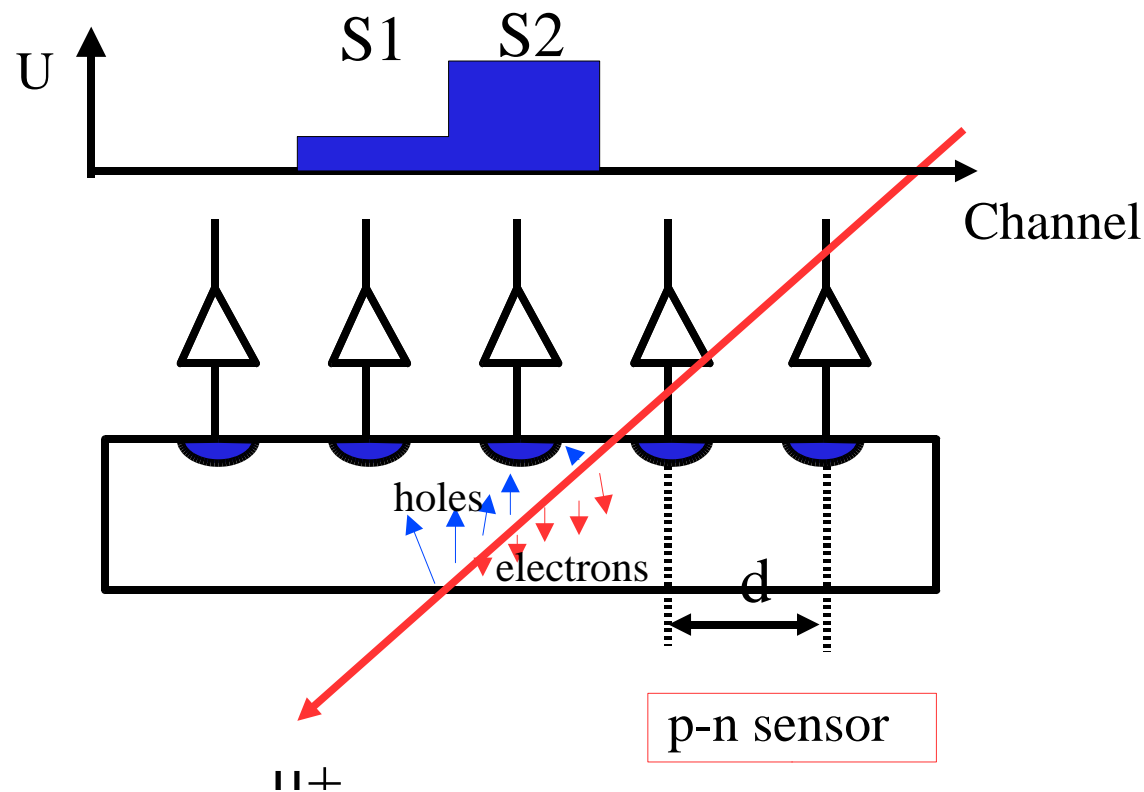

- The position of the track/interaction can be determined from the output pulse from the amplifiers (*This requires that all pulse height information is read out*). The resolution, σ , is proportional to the S/N. (1 μm resolutions have been demonstrated)

$$x = \frac{S_2}{S_1 + S_2} d$$

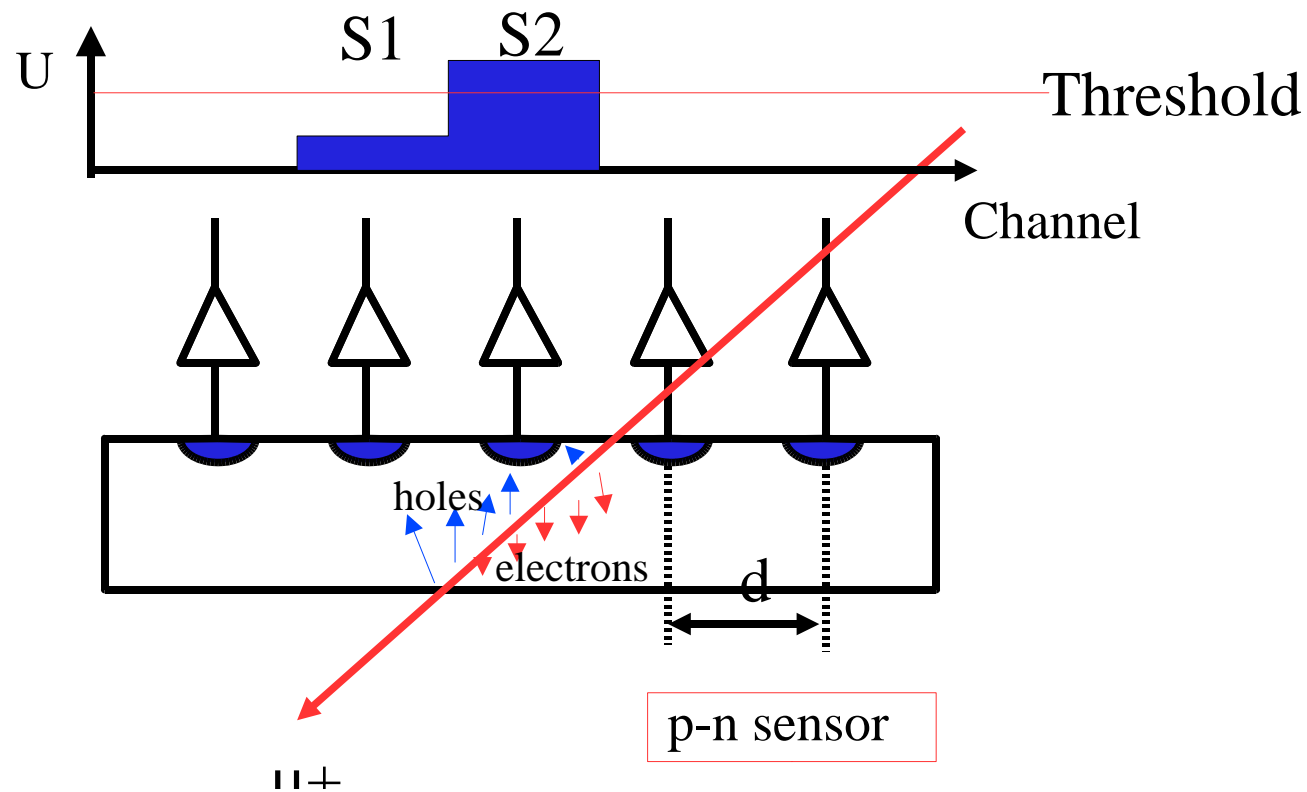

- Many times the pulse height information is not read out. The signal is discriminated by a threshold in the readout circuit. This readout method is called binary. The resolution for such system is given by

$$\sigma_{\text{Binary}} = \frac{d}{\sqrt{12}}$$

Diffusion

- For segmented detectors the diffusion of free charge carriers in the semiconductor sensor will smear the resolution of the system. The interaction in a semiconductor creates a charge cloud with high concentration of free charge carriers. The probability for charge carriers to move from a region of high concentration to a region with lower concentration is higher than in the opposite direction → diffusion.



$$\sigma_{Diff} = \sqrt{\frac{2kT}{q} \mu_{h(e)} t_{drift}}$$

t_{drift} = time for the charge to drift out to the readout electrode


$\mu_{h(e)}$ = mobility of hole or electron (*depending upon what we collect*)

Strip (array) detectors

- Strip detectors are commonly used in particle physics and in event driven applications with high multiplicity. Characteristics
 - Fully depleted sensor for good signal efficiency
 - Low number of readout channels for a large active surface
 - Fast readout speed
 - If energy information is not critical the readout channel number can be reduced by capacitive and resistive charge division
 - 1-dimensional position information orthogonal to strip direction. *(2-dimensional position information can be achieved with double sided sensors)*
 - The strip electronics can contain complex electronics (discriminator, de-randomise buffer, counter e.t.c.)
 - Typical strip pitch 25 μm to 1mm, position resolution down to 1 μm
 - Used in high energy physics, autoradiography (betas), scanning devices in medicine (X-rays) e.t.c.

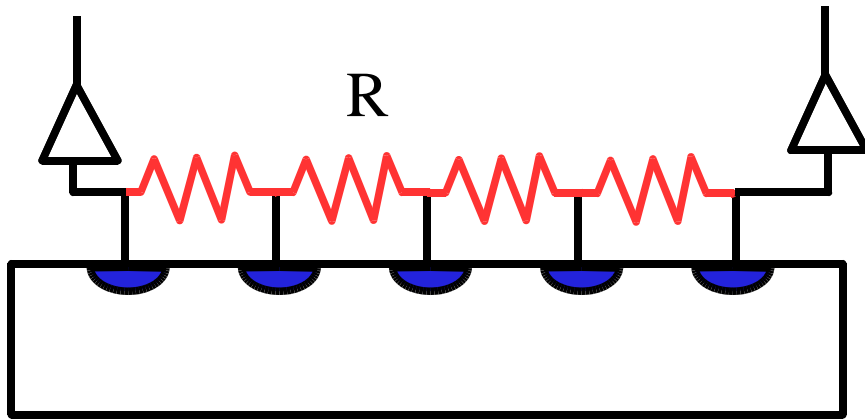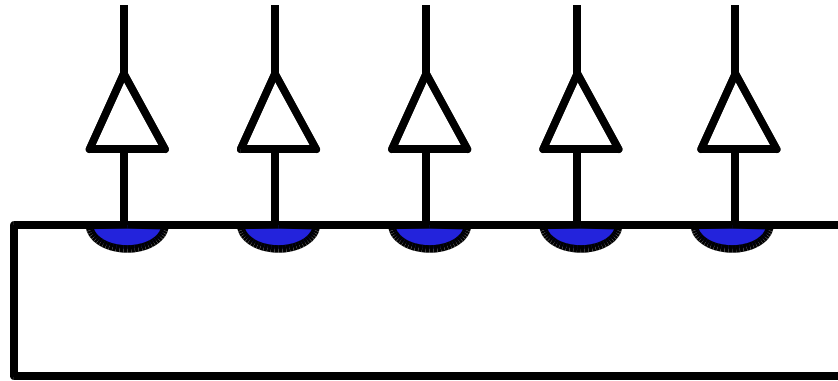



Resistive charge division:
Resistance will degrade noise performance, hence only applicable to large charge signals

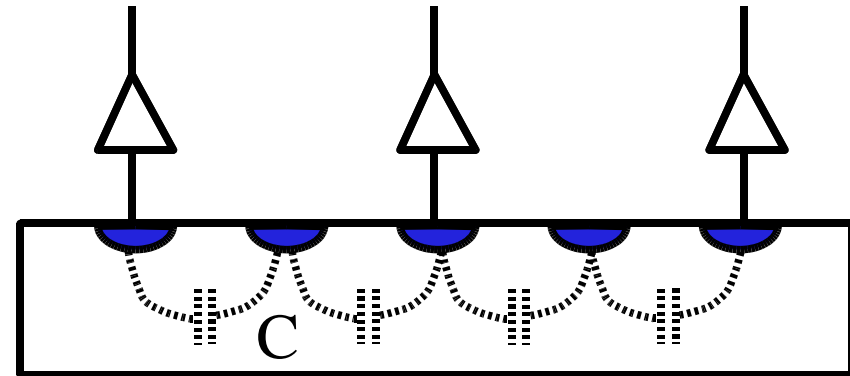

Capacitive charge division:
Small loss in S/N but only limited reduction of readout channels

Pixel detectors

- A 2-dimensional sensor with readout electronics in every pixels. The sensor and the readout electronics are laid on top of each other “flip-chip” and connected by interconnecting bumps → hybrid pixel detector. *The monolithic pixel detectors is a recent development with readout electronics integrated into the pixel.* Characteristics of pixel detectors:
 - Fully depleted sensor for good signal efficiency
 - Large number of readout channels
 - Fast readout speed
 - Can be used for imaging (integrating events) and for single event readout
 - The pixel electronics can contain complex electronics (discriminator, de-randomise buffer, counter e.t.c.)
 - Typical pixel pitch 25 μm to 1mm, position resolution down to few μm
 - Used in medicine (X-rays), space (X-rays), high energy physics e.t.c.

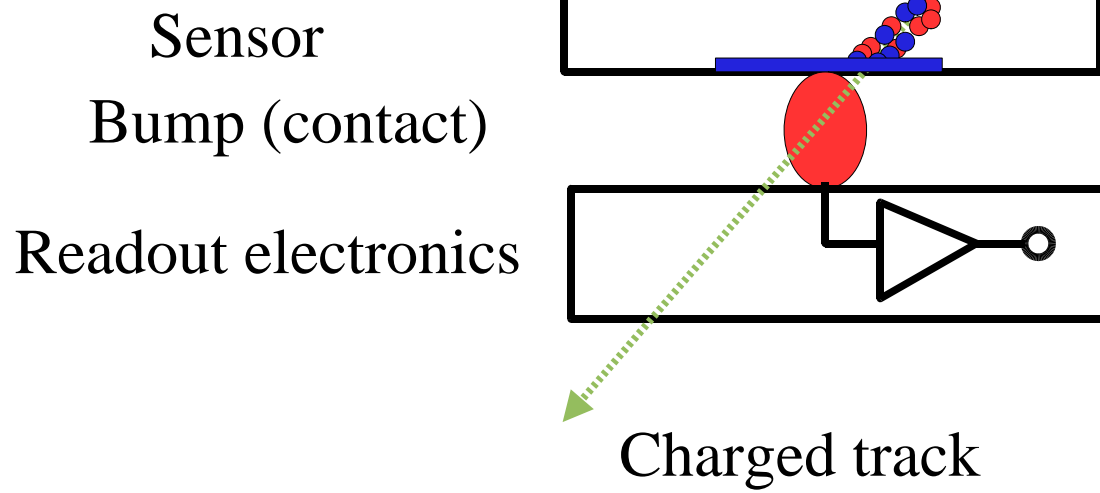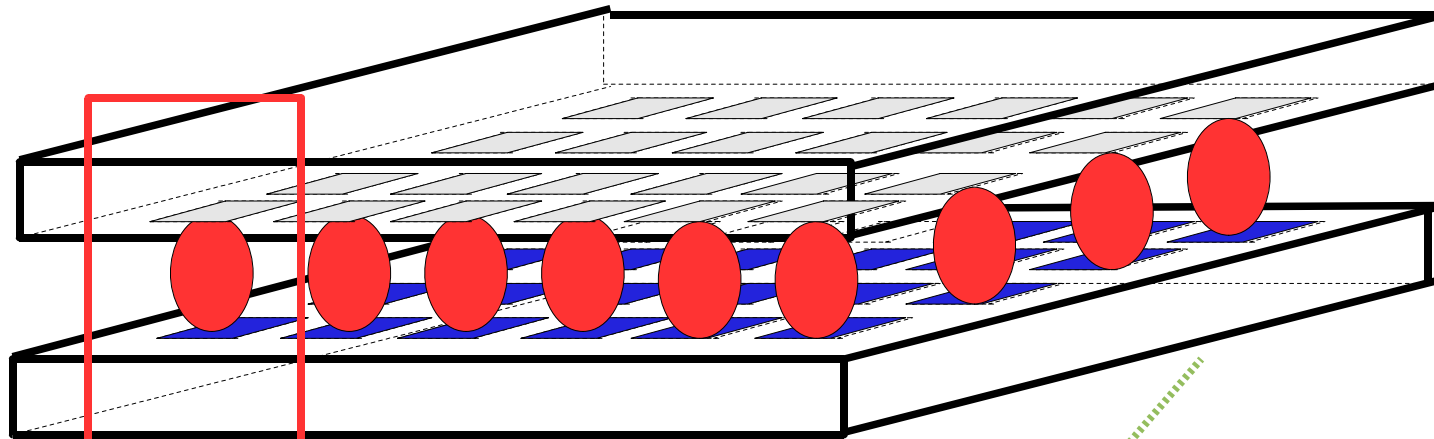

Sensor

Bump (contact)

Readout electronics



Charged track

Drift detectors

Drift detectors give an alternative way of achieving 2-d readout to pixelised detectors. In the Drift detector the electric field is horizontal (sideways). A fully depleted drift detector has p+ strips implanted on both sides and a n+ strip/pad on one side. The p+ strips give the position information with the signal from drifting holes while the n+ strip collect electrons with fast time response and good energy resolution.

Characteristics of a drift detector

- Fully depleted sensor for good signal efficiency
- Slow readout
- Good energy resolution
- Used in space (X.-rays), high multiplicity physics (nuclear)

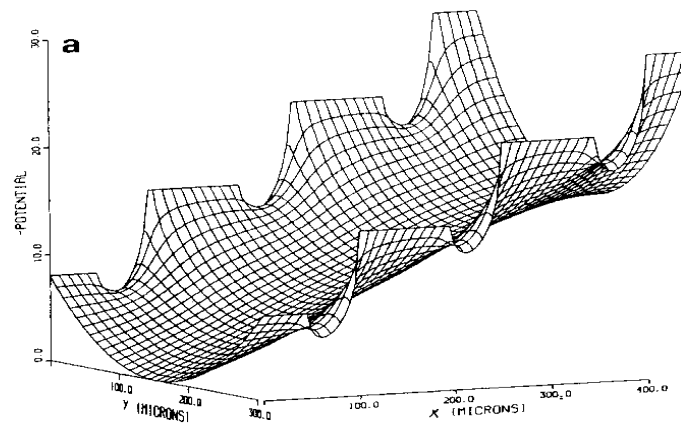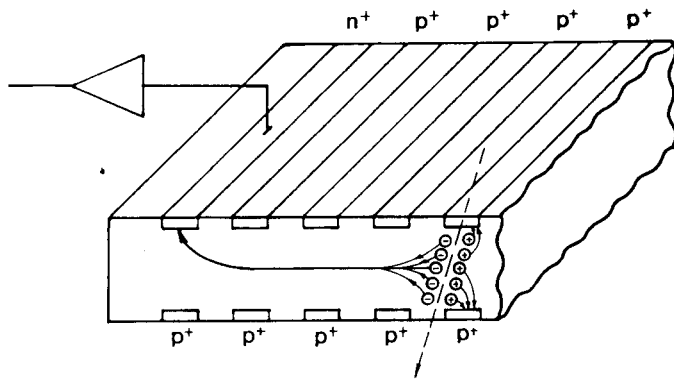

Photodiodes

Semiconductors we have discussed have so far only provided the primary ionisation. In some applications (especially detecting low energy photons) the semiconductor sensor is turned into an amplifier by operating the sensor with very high fields causing charge multiplication → Avalanche photodiodes.


Avalanche photodiodes are widely used in optical data transmission where GaAs is the preferred material.

- Benefits:
 - large signal from the sensor
 - high speed
 - compact (compared with other methods)
- Penalty:
 - linearity
 - different amplification onset for electrons and holes. This effect is large for Si but small for GaAs.

p+
(charge multiplication)

n+

γ

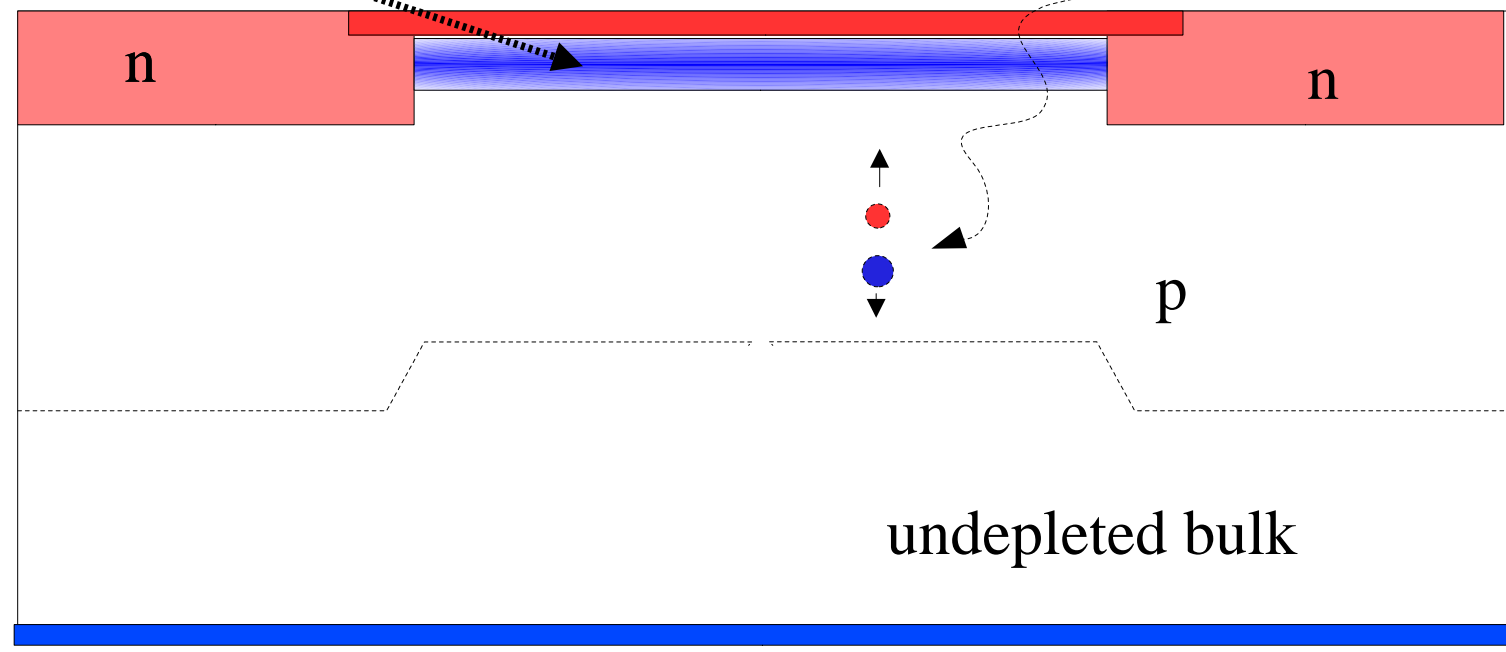

p

undepleted bulk


p+

Charge Couple Devices

- CCD's are widely used in video cameras. The sensors are not depleted structures but works with MOS depletion layers. For low noise and with low particle fluxes (like in astronomy) the CCD's must be cooled. In medicine CCD's are used together with converters like scintillators. The CCD's are pixelised by metal electrodes in one direction and by implants in the other direction. By changing the potential of the electrodes the charged collected by the CCD can be transported to the amplifier which is integrated with the CCD (monolithic).

Characteristics of a CCD

- Non depleted (low efficiency for X-rays)
- Slow (since the charge has to be transported through many pixels)
- Pixels do not contain electronics hence no processing like setting threshold can be done in the pixel.
- Large number of pixels
- Typical pixel pitch $10\ \mu\text{m}$, position resolution down to μm
- Widely used for imaging applications and in high energy physics
- Limited radiation tolerance

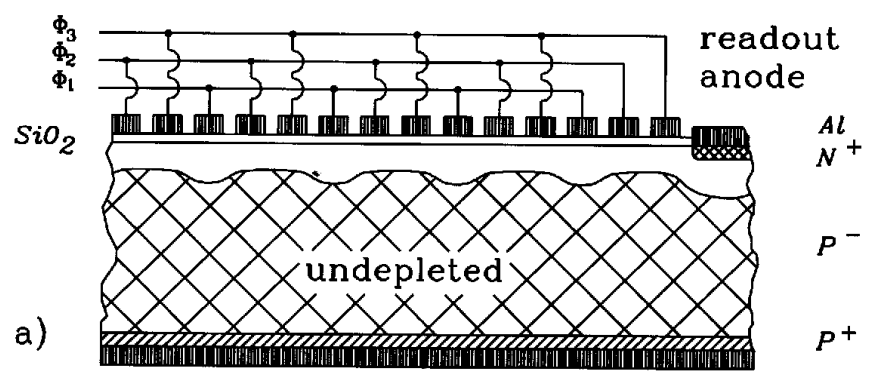

a)



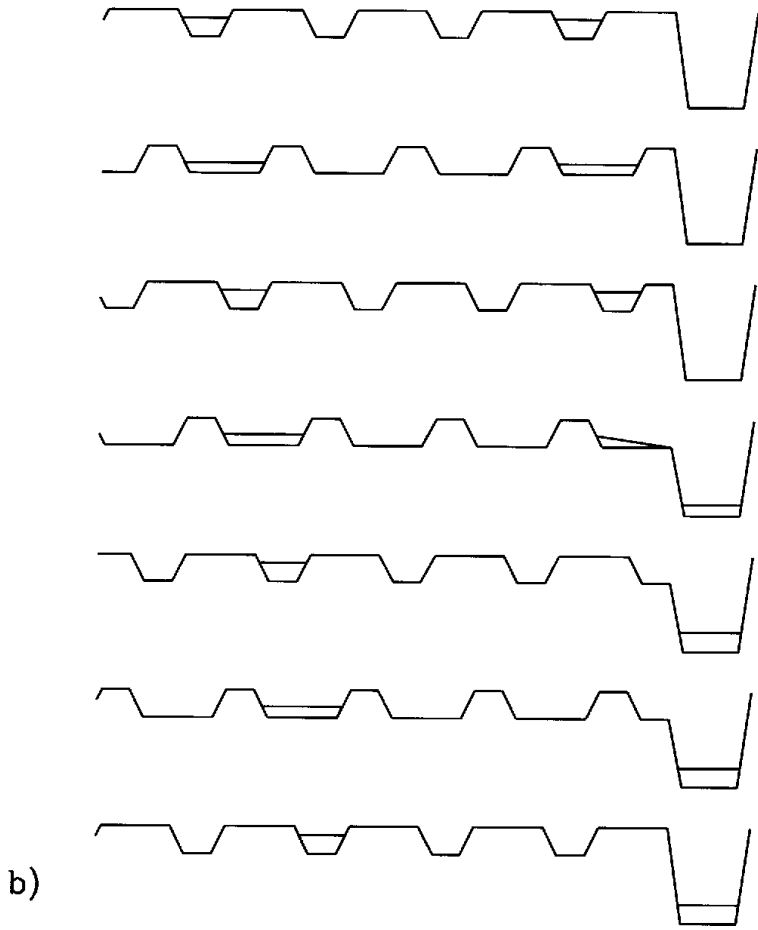


FIG. 2. CCD structure and potential well movement.

END LECTURE

Signal formation in the detector

Delta pulse (photon)

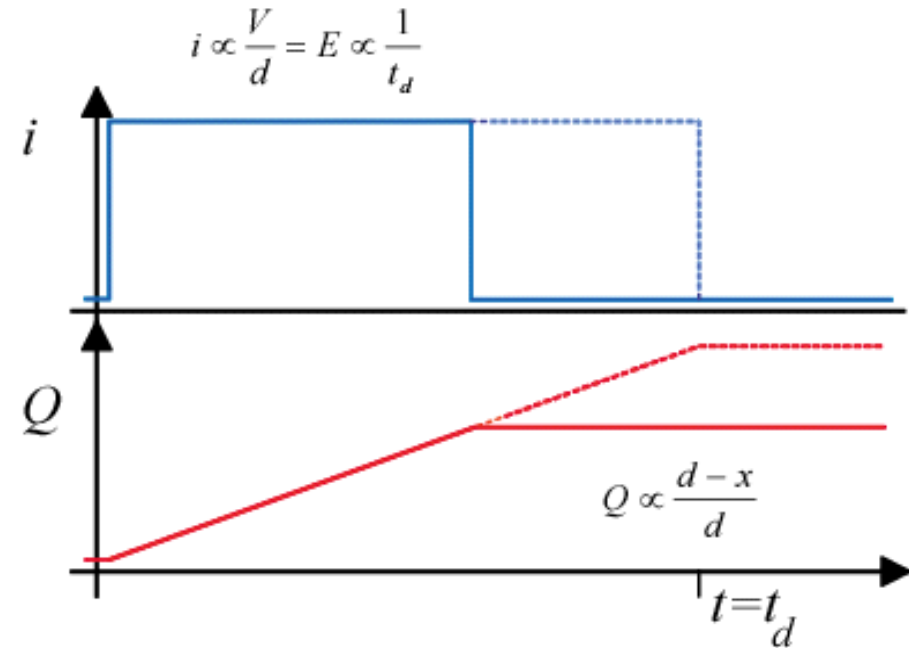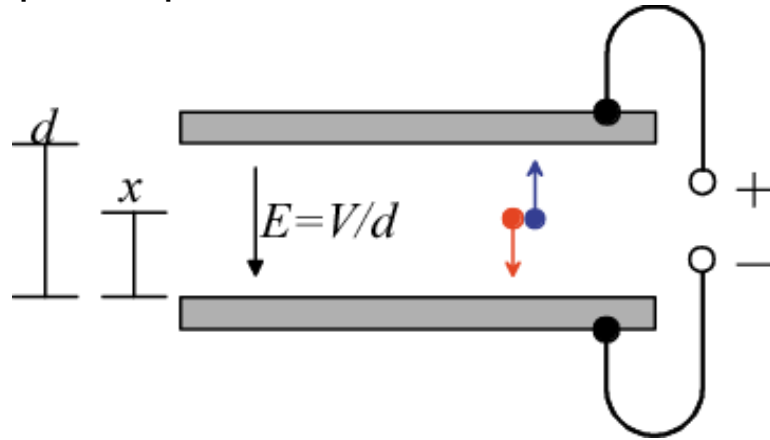

Continuous pulse (charged track)

